

BRIEF COMMUNICATIONS

Robotic whiskers used to sense features

Whiskers mimicking those of seals or rats might be useful for underwater tracking or tactile exploration.

Several species of terrestrial and marine mammals with whiskers (vibrissae) use them to sense and navigate in their environment — for example, rats use their whiskers to discern the features of objects¹, and seals rely on theirs to track the hydrodynamic trails of their prey². Here we show that the bending moment — sometimes referred to as torque — at the whisker base can be used to generate three-dimensional spatial representations of the environment, and we use this principle to construct robotic whisker arrays that extract precise information about object shape and fluid flow. Our results will contribute to the development of versatile tactile-sensing systems for robotic applications, and demonstrate the value of hardware models in understanding how sensing mechanisms and movement control strategies are interlocked.

Rats actively whisk (rotate) their whiskers against objects during exploration¹, whereas seals keep their whiskers relatively fixed in order to track fluid wakes². Using classical elasticity theory^{3,4}, we modelled the rat whisker as a conical beam bending against an object, and derived a monotonic relationship between the radial contact distance, d , and rate of change of moment, M , at the whisker base (see supplementary information). This theoretical solution was experimentally verified by using a strain gauge to measure moment at the base of a rat's plucked whisker as it was smoothly rotated against a slender peg placed at various radial distances (Fig. 1a). Agreement was excellent between the actual radial distance and that obtained from the experiment (for details, see supplementary information).

To investigate the shape-extraction capability of this encoding mechanism, we constructed a 4×1 array of robotic whiskers. Each spring-steel wire whisker was fitted with four strain gauges at its base to measure the two orthogonal components of moment. We tested the array by whisking it across a small, sculpted head, an object selected specifically for its intricate concavities and convexities (for details and video, see supplementary information). Whisking was performed with the array at evenly spaced heights and angles. Analysis of moments on each whisker provided four radial contact points in three-dimensional space (one for each whisker). Fitting a smooth surface to the contact points then resulted in a faithful extraction of the original shape of the sculpture (Fig. 1b).

To test the ability of whiskers to extract the

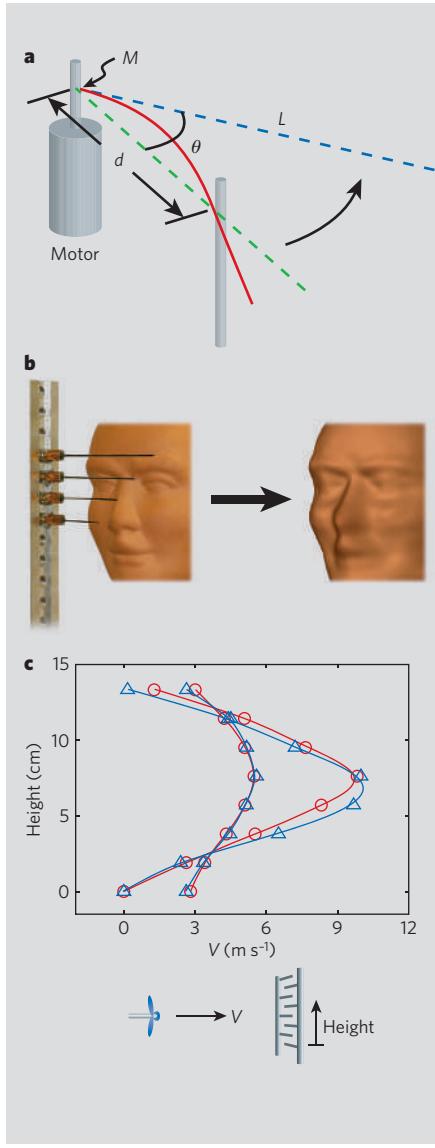


Figure 1 | Whisker arrays extract information about complex environmental features. **a**, A whisker (red) of length L rotates through an angle θ against an object at distance d , which elicits a moment M at the base. **b**, Extraction of information about an object shape using an artificial whisker array (whisker lengths are 2, 3, 4 and 5 cm). **c**, Fluid-flow profiles, determined using two opposing whisker arrays, arranged as shown in the inset. V is the fluid velocity and each whisker is $0.5\text{ cm} \times 11\text{ cm}$. Blue curve: data from whisker array; red: data from a Pitot tube placed at the height of each whisker, which gives the true air speed. Standard deviations (10 trials) are within the size of the symbols.

features of fluid flows, we used two opposing 4×1 whisker arrays (Fig. 1c, inset). Each stainless steel wire was replaced with a thin, flexible, plastic strip to ensure that there was a large surface area normal to the flow and to maximize bending. When a stream of air moving at velocity V was directed towards the centre of the array, each whisker was deflected by a magnitude that was dependent on its distributed load, permitting an accurate characterization of the shape of the fluid stream (Fig. 1c). More complex whisker configurations would allow flow patterns to be described in three dimensions, which might enable moving underwater objects to be tracked by wake.

Until now, neural responses of the whisker system have been described mainly in terms of kinematic variables, that is, position and its variation with time. Our findings indicate that the primary sensory neurons of animals that use their whiskers for exploration may also encode information about moment. This idea is consistent with physiological recordings from the rat trigeminal ganglion⁵. Sensing moment at the whisker base during contact with an object could be a low-frequency counterpart to the whisker vibrations that are thought to be used to discriminate textures^{6,7}.

Our results on biomimetically engineered whiskers may find application in land-based robots and autonomous underwater vehicles, in which a capability for tactile perception could broaden and enhance performance.

Joseph H. Solomon*, **Mitra J. Hartmann***†

Departments of *Mechanical Engineering and †Biomedical Engineering, Northwestern University, Evanston, Illinois 60208, USA
e-mail: m-hartmann@northwestern.edu

- Krupa, D. J., Matell, M. S., Brisben, A. J., Oliveira, L. M. & Nicolelis, M. A. L. *J. Neurosci.* **21**, 5752–5763 (2001).
- Dehnhardt, G., Mauck, B. & Bleckmann, H. *Nature* **394**, 235–236 (1998).
- Kaneko, M., Kanayama, N. & Tsuji, T. *IEEE Trans. Robotic. Autom.* **14**, 278–291 (1998).
- Clements, T. N. & Rahn, C. D. *IEEE Trans. Robotic.* **22**, 844–848 (2006).
- Szwed, M. et al. *J. Neurophysiol.* **95**, 791–802 (2006).
- Neimark, M. A., Andermann, M. L., Hopfield, J. J. & Moore, C. I. *J. Neurosci.* **23**, 6499–6509 (2003).
- Hartmann, M. J., Johnson, N. J., Towal, R. B. & Assad, C. *J. Neurosci.* **23**, 6510–6519 (2003).

Supplementary information accompanies this communication on Nature's website.

Received 30 June; accepted 8 September 2006.
Competing financial interests: declared none.

doi:10.1038/443525a

BRIEF COMMUNICATIONS ARISING online
► www.nature.com/bca see *Nature* contents.